


# Blackhawk MVDS Composite Cable Assembly BH-030

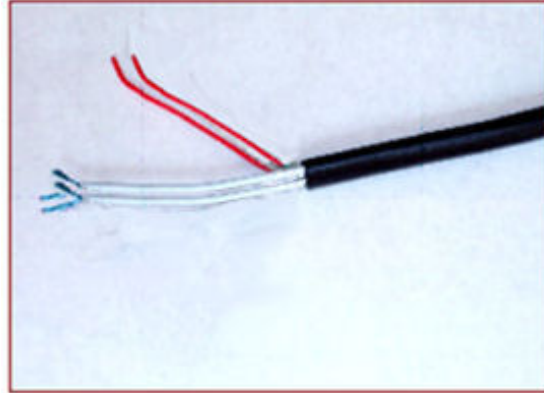

Blackhawk BH-031 MVDS composite cable assemblies provide high quality cables within a single jacket for ease and neatness of MVDS installations. Two 18 ga. TFFN wires provide power and two dual twisted pairs, one with individual shields and common drain for RS-422/485 and one with common shield and drain for RS-232..

With a rugged UV resistant PVC jacket, the composite cable provides an ideal solution for most outdoor MVDS applications.

<b>Outer Jacket:</b>		<b>Power:</b>	
Material	UV Resistant PVC	No. of wires	2
Nom. Jacket Thickness	.09"	AWG size	18 AWG
Tensile Strength	2,650 psi	Type	TFFN
No Lead Content		Strands	26
		Voltage	600V
		High Temp	+90 Celsius
		Jacket	Nylon over PVC
<b>Low Speed Data:</b>	RS-232	<b>Low Speed Data:</b>	RS-422/485
Data Cable:		Data Cable:	
No. of Pairs	2	No. of Pairs	2
AWG Size	22 AWG	AWG Size	22 AWG
Each pair individually shielded	No	Each pair individually shielded	Yes
Both pairs common shielded	Yes	Both pairs common shielded	Yes
Common shield drain wire	Yes	Common shield drain wire	Yes
Nom. Capacitance	26 pF/FT	Nom. Capacitance	26 pF/FT

For ordering information contact: Blackhawk Enterprises at (850) 668-5293 or e-mail to [blhawk99@aol.com](mailto:blhawk99@aol.com)

Visit us on the web at [www.blackhawkenterprises.com](http://www.blackhawkenterprises.com)

Updated 7-2-2010